

LED line PRIME


Code: 479686

EAN: 5907777479686

LED line PRIME FUSION linear lamp
60W 4000K 7800lm 0-10V P18° black



FUSION 60W linear housing from PRIME LED line is a modern lighting solution that emits a light stream of 7800 lm at 4000 K colour temperature. Thanks to the P18° lens you can get precise direction of light, which increases lighting efficiency in different arrangements. The aluminium design provides optimal heat discharge and a durability of L70B50 of up to 50,000 hours.

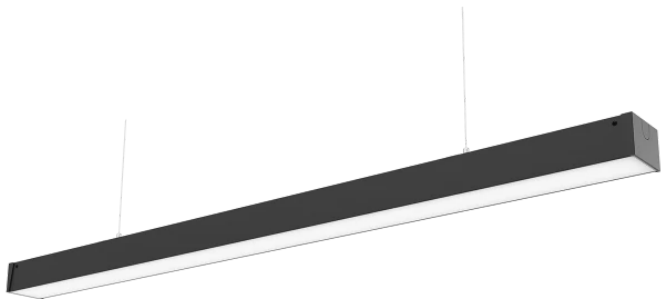

Technical data

Parameter	Value
Voltage	• 220-240 V AC
Sling length	200 cm
Luminous efficacy	130
Colour of the light	White
Energy efficiency class 2019/2015	C
Luminous flux	7800
Colour consistency in McAdam ellipses	≤6
Standby power	0
Warranty (years)	5
IP protection rating	IP20
Dimmable function	0-10
Survival factor	0.9
Lifetime L70B50	50 000 h

Parameter	Value
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
The lumen maintenance factor	96
Power Factor	0,9
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
IEC protection class	I
IK protection rating	08
Lamp's warm-up time to 60%	1 s
Correlated colour temperature	• 4000 K
Power	• 60 W

LED line PRIME

Code: 479686


EAN: 5907777479686

**LED line PRIME FUSION linear lamp
60W 4000K 7800lm 0-10V P18° black**

Technical drawing




Light distribution

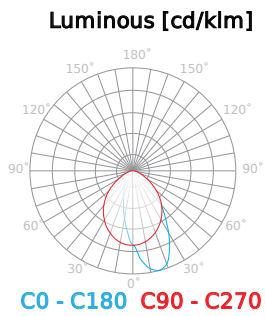


Additional product photos




Logistics data



Single packaging



Bulk packaging



Europallet

LED line PRIME

Code: 479686

EAN: 5907777479686

**LED line PRIME FUSION linear lamp
60W 4000K 7800lm 0-10V P18° black**

Example application