

LED line PRIME



Code: 479686

EAN: 5907777479686

Linear luminaire FUSION 4000K 60W
7800lm P18° IP20 150cm black PRIME 0-10V



FUSION 60W linear housing from PRIME LED line is a modern lighting solution that emits a light stream of 7800 lm at 4000 K colour temperature. Thanks to the P18° lens you can get precise direction of light, which increases lighting efficiency in different arrangements. The aluminium design provides optimal heat discharge and a durability of L70B50 of up to 50,000 hours.

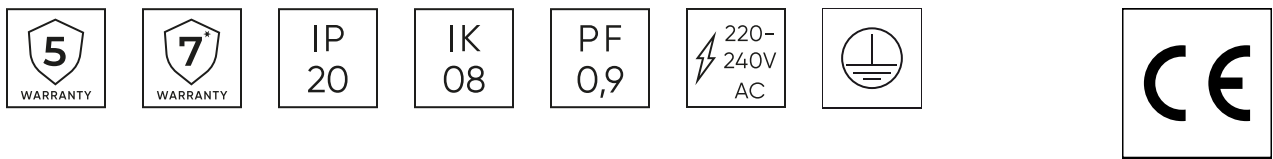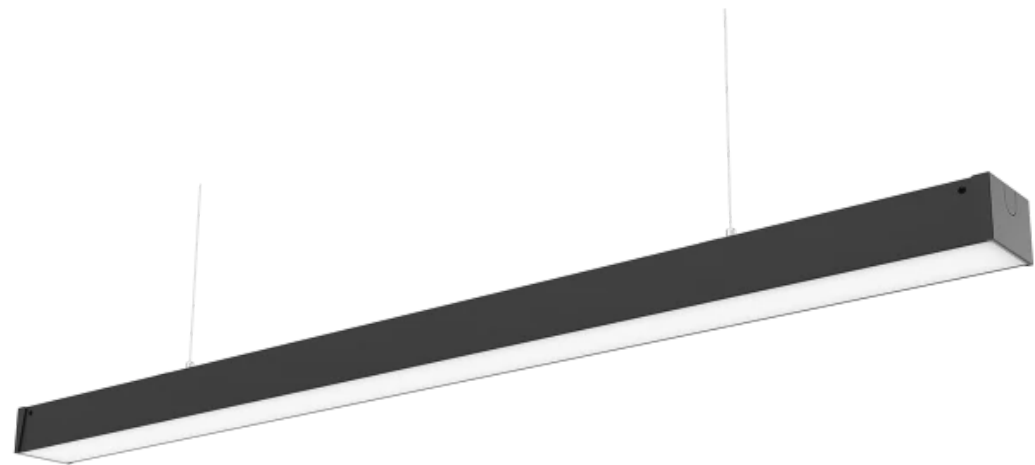

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 60 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	7800
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52


LED line PRIME

Code: 479686


EAN: 5907777479686

Linear luminaire FUSION 4000K 60W
7800lm P18° IP20 150cm black PRIME 0-10V

Technical drawing




Light distribution

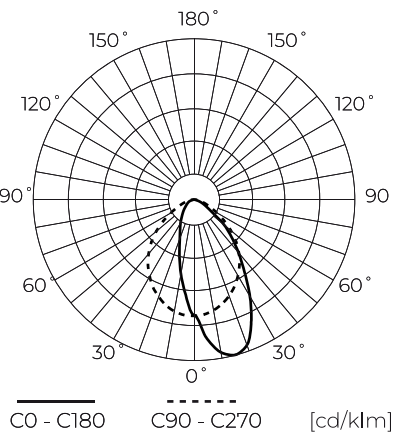

Additional product photos




Logistics data




Single packaging

Width	1444 mm
Height	52 mm
Length	70 mm
Weight	1,97 kg



Bulk packaging

Quantity	12
Width	1550 mm
Height	260 mm
Length	260 mm
Volume	0,104 m3
Weight	23,89 kg
Comments	



Europallet

Quantity	144
Height	1550 mm
Quantity in layer	144
Number of layers	1
Bulk quantity	144
Weight	286,8 kg

LED line PRIME

Code: 479686

EAN: 5907777479686

**Linear luminaire FUSION 4000K 60W
7800lm P18° IP20 150cm black PRIME 0-
10V**

Example application