


LED line PRIME

Code: 201255-DALI

EAN: 5905378220003

**Panel Backlit 28W 4000K 4000lm
60x60 DALI PRIME**

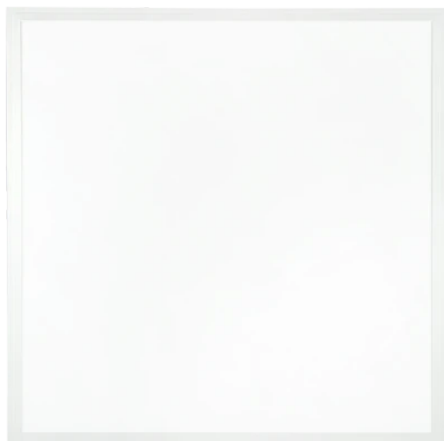

Backlit LED line PRIME 28W panel is a high quality 595x595 mm lighting luminaire emitting cool white light with a colour temperature of 4000K and a light stream of 4000 lm. The use of SMD LEDs 2835 guarantees excellent energy efficiency of 142 lm/W and long life of L70B50 reaching 75,000 hours.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 28 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IEC protection class	II
Luminous efficacy	142
Luminous flux	4000
The lumen maintenance factor	96
Lifetime L70B50	75 000 h
Survival factor	0.9

Parameter	Value
Dimmable function	PWM
Colour consistency in McAdam ellipses	≤3
Frequency of the supply voltage	50/60Hz
Beam angle	120
LED type	SMD LED 2835
LED quantity	96
Power Factor	0.9
Number of on/off cycles	25000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-25÷45
For indoor use	Inside
Colour	white
Material (housing)	Aluminium
Material (cover)	Polystyrene

LED line PRIME

Code: 201255-DALI


EAN: 5905378220003

**Panel Backlit 28W 4000K 4000lm
60x60 DALI PRIME**


Technical drawing

Light distribution


Additional product photos




Logistics data



Single packaging



Bulk packaging



Europallet

LED line PRIME

Code: 201255-DALI

EAN: 5905378220003

**Panel Backlit 28W 4000K 4000lm
60x60 DALI PRIME**

Example application

