

LED line PRIME


Code: 202788

EAN: 5905378202788

**FLOODLIGHT 3CCT (3K/4K/5K) 150W  
21000lm 120° IP66 PRIME**



The 150W PRIME Floodlight LED line reflector is distinguished by a light output of 21000 lumens and 120° light angle. Equipped with SMD2835 diodes, it provides effective lighting, available at three colour temperatures: 3000 K, 4000 K and 5000 K. The aluminium and tempered glass housing guarantees durability and resistance to atmospheric conditions.



**Technical data**

Parameter	Value
Energy efficiency class 2019/2015	D
Warranty	5/7*
Power	• 150 W
Voltage	• 100-277 V AC
Correlated colour temperature	• 3000 K • 4000 K • 5000 K
Colour of the light	CCT
Colour rendering index Ra	70
IP protection rating	IP66
IK protection rating	08
IEC protection class	I
Luminous efficacy	140
Luminous flux	21000
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Mounting type	surface
Frequency of the supply voltage	50/60Hz
Beam angle	120
LED type	SMD2835
Power Factor	0,9
Number of on/off cycles	50000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-40÷45
Height	54
Material (housing)	Aluminium
Material (cover)	Tempered glass


LED line PRIME

Code: 202788


EAN: 5905378202788

**FLOODLIGHT 3CCT (3K/4K/5K) 150W  
21000lm 120° IP66 PRIME**

**Technical drawing**

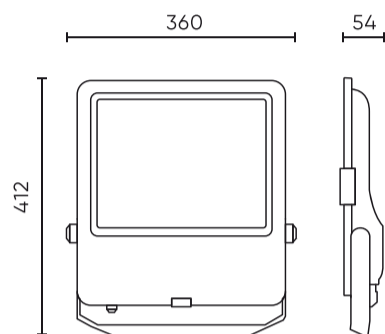

**Light distribution**

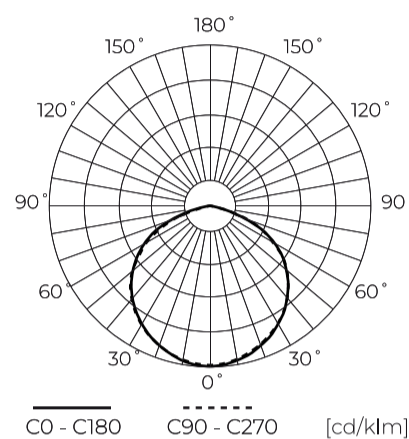

**Additional product photos**

**Logistics data**



**Single packaging**

Width	412 mm
Height	54 mm
Length	360 mm
Weight	3,57 kg

**Bulk packaging**

Quantity	1
Width	450 mm
Height	80 mm
Length	420 mm
Volume	0,015 m3
Weight	3,57 kg
Comments	

**Europallet**

Quantity	60
Height	1920 mm
Quantity in layer	2
Number of layers	24
Bulk quantity	48
Weight	25 kg

---

LED line PRIME

Code: 202788

EAN: 5905378202788

**FLOODLIGHT 3CCT (3K/4K/5K) 150W  
21000lm 120° IP66 PRIME**

---

**Example application**