

LED line LITE



Code: 210011

EAN: 5905378210011

**DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K)
18/21/24W 2000lm round IP20 black
LITE**



Downlight EASY FLEX 18-21-24W CCT 2000lm is an innovative round-shaped LED housing, made in classic black colours. It generates a light stream of 2,000 lumens, offering flexibility for power selection – 18W, 21W or 24W. The built-in colour temperature change function (3000K, 4000K and 5000K) allows to adjust the lighting atmosphere according to individual needs.

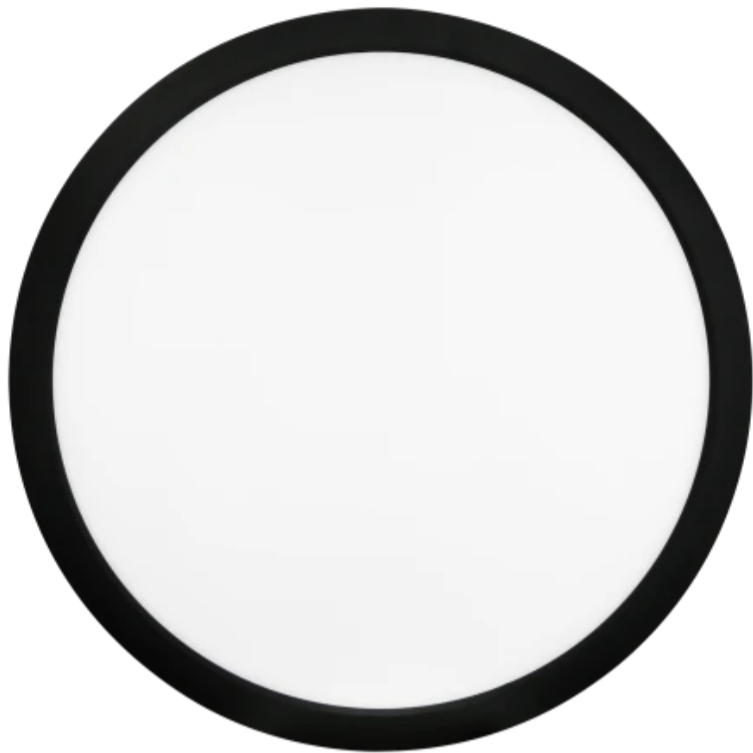

Technical data

Parameter	Value
Energy efficiency class 2019/2015	E
Warranty	3
Power	<ul style="list-style-type: none"> • 18 W • 21 W • 24 W
Voltage	<ul style="list-style-type: none"> • 220-240 V AC
Correlated colour temperature	<ul style="list-style-type: none"> • 3000 K • 4000 K • 5000 K
Colour of the light	CCT
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	05
IEC protection class	II
Luminous efficacy	83
Luminous flux	2000
The lumen maintenance factor	96
Lifetime L70B50	30 000 h
Survival factor	0.9

Parameter	Value
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Beam angle	120
LED type	SMD2835
LED quantity	168
Number of on/off cycles	15000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷40
For indoor use	Inside
Installation method	3in1 surface mounted, flush mounted, suspended
Mounting hole diameter	65-240
Height	17 mm
Fixture's diameter	300 mm
Colour	Black


LED line LITE

Code: 210011


EAN: 5905378210011

**DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K)
18/21/24W 2000lm round IP20 black
LITE**

Technical drawing

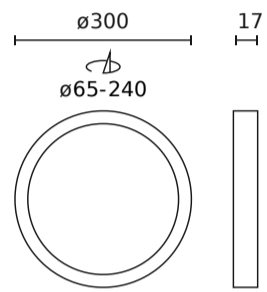

Light distribution

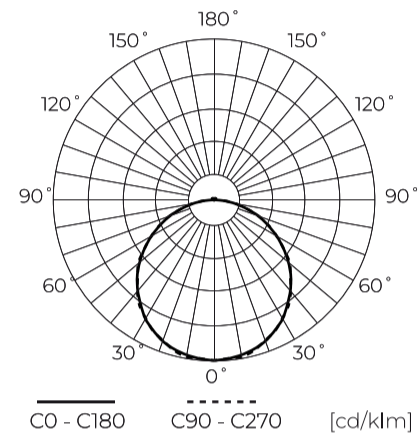

Additional product photos



Logistics data



Single packaging

Width	31 mm
Height	305 mm
Length	305 mm
Weight	0,55 kg

Bulk packaging

Quantity	10
Width	325 mm
Height	325 mm
Length	335 mm
Weight	8,42 kg

Europallet

Bulk quantity	240
---------------	-----

LED line LITE

Code: 210011

EAN: 5905378210011

**DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K)
18/21/24W 2000lm round IP20 black
LITE**

Example application