

LED line PRIME

Code: 204270

EAN: 5905378204270

**Linear luminaire FUSION 4000K 60W  
7800lm P18° IP20 150cm white PRIME**



The FUSION 60W LED line PRIME liner provides performance of 7,800 lumens at 4000K colour temperature. Thanks to its high light efficiency of 130 lm/W and the possibility to adjust the angle of light distribution with interchangeable lenses, it is an excellent solution for various applications. The sturdy aluminium body guarantees effective heat discharge and a long life of 50,000 hours.



**Technical data**

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 60 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	7800
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	50 000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0.9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52


LED line PRIME

Code: 204270

EAN: 5905378204270


**Linear luminaire FUSION 4000K 60W  
7800lm P18° IP20 150cm white PRIME**

**Technical drawing**






**Light distribution**

**Additional product photos**

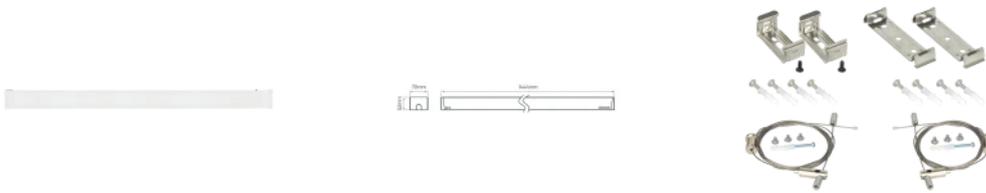

**Logistics data**



**Single packaging**

Width	1444 mm
Height	52 mm
Length	70 mm
Weight	1,97 kg

**Bulk packaging**

Quantity	12
Width	1550 mm
Height	260 mm
Length	260 mm
Volume	0,104 m3
Weight	23,89 kg
Comments	

**Europallet**

Quantity	144
Height	1550 mm
Quantity in layer	144
Number of layers	1
Bulk quantity	144
Weight	286,8 kg

---

LED line PRIME

Code: 204270

EAN: 5905378204270

**Linear luminaire FUSION 4000K 60W  
7800lm P18° IP20 150cm white PRIME**

---

**Example application**