

LED line LITE

Code: 200999

EAN: 5905378200999

DOWNLIGHT MOLLY 3CCT(3K/4K/6K)
18W 1900lm round IP20 White LITE



LED line LITE Downlight MOLLY 18W provides excellent light efficiency at 1900 lumen levels. Thanks to the wide range of colour temperature (3000-6000K) it perfectly reflects colours, reaching Ra >80. The product is characterized by minimalistic design and possibility of surface and surface mounting. The polycarbonate housing guarantees durability and the IP20 seal class makes it suitable for different interiors.



3
WARRANTY

IP
20

IK
05

PF
0,5

220-240V
AC

MAX
-20÷40°C

CE

Technical data

Parameter	Value
Energy efficiency class 2019/2015	D
Warranty	3
Power	• 18 W
Voltage	• 170-260 V AC
Correlated colour temperature	• 3000 K • 4000 K • 6000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IEC protection class	II
Luminous efficacy	105
Luminous flux	1900
The lumen maintenance factor	96
Lifetime L70B50	30 000 h
Survival factor	0.9

Parameter	Value
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Beam angle	110
LED type	SMD LED 2835
LED quantity	120
Power Factor	0,5
Number of on/off cycles	20000
Ambient temperature suitable for operation	-20÷40
For indoor use	Inside
Mounting hole diameter	140-160
Height	26
Fixture's diameter	170 mm
Colour	White
Material (housing)	Polycarbonate

LED line LITE


Code: 200999

EAN: 5905378200999


DOWNLIGHT MOLLY 3CCT(3K/4K/6K)

18W 1900lm round IP20 White LITE

Technical drawing




Light distribution

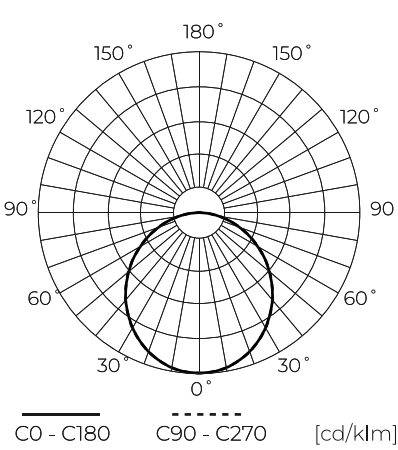

Additional product photos




Logistics data




Single packaging

Quantity	1
Width	178 mm
Height	39 mm
Length	177 mm
Weight	0,187 kg



Bulk packaging

Quantity	60
Width	390 mm
Height	374 mm
Length	551 mm
Volume	0,080 m3
Weight	12,1 kg



Europallet

Quantity	1200
Height	1,9 m
Quantity in layer	240
Number of layers	5
Bulk quantity	20
Weight	272 kg

LED line LITE

Code: 200999

EAN: 5905378200999

**DOWNLIGHT MOLLY 3CCT(3K/4K/6K)
18W 1900lm round IP20 White LITE**

Example application

