


LED line PRIME

Code: 475954

EAN: 5907777475954

**Linear luminaire FUSION 4000K 60W
7800lm 60*110° IP20 150cm black PRIME**

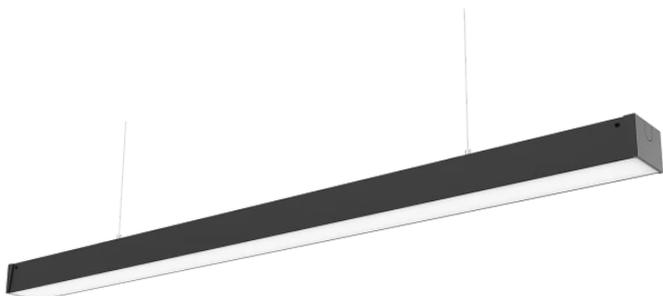

FUSION 60W linear mounting from the LED line PRIME is a perfect solution for demanding users. It emits a neutral light with a temperature of 4000 K and a luminous flux of 7800 lm, ensuring efficiency of 130 lm/W. The casing made of high quality aluminium guarantees durability and effective heat removal. IP20 leak class and IK08 resistance confirm its reliability.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 60 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	7800
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	50 000 h
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52


LED line PRIME

Code: 475954


EAN: 5907777475954

**Linear luminaire FUSION 4000K 60W
7800lm 60*110° IP20 150cm black PRIME**

Technical drawing





Light distribution

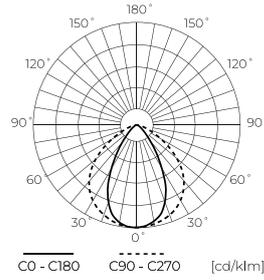

Additional product photos



Logistics data



Single packaging

Width	1444 mm
Height	52 mm
Length	70 mm
Weight	1,97 kg

Bulk packaging

Quantity	12
Width	1550 mm
Height	260 mm
Length	260 mm
Volume	0,104 m3
Weight	23,89 kg
Comments	

Europallet

Quantity	144
Height	1550 mm
Quantity in layer	144
Number of layers	1
Bulk quantity	144
Weight	286,8 kg

LED line PRIME

Code: 475954

EAN: 5907777475954

**Linear luminaire FUSION 4000K 60W
7800lm 60*110° IP20 150cm black PRIME**

Example application