


LED line PRIME

product\_card.label\_product\_codeproduct\_card.label\_product\_gtin:  
4756405907777475640

LED line PRIME Linear fixture FUSION  
20W 4000K 2600lm 0-10V 30\*90° black

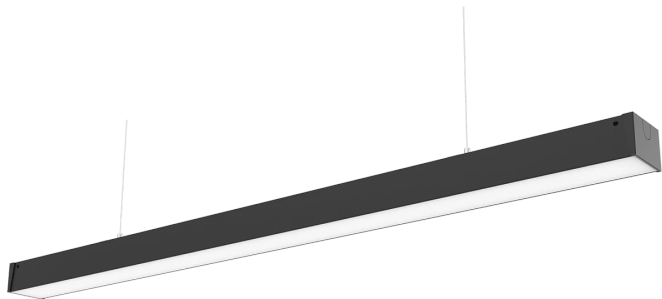

product\_card.label\_technical\_data

| product_card.label_attribute_name     | product_card.label_attribute_value | product_card.label_attribute_name          | product_card.label_attribute_value                           |
|---------------------------------------|------------------------------------|--------------------------------------------|--------------------------------------------------------------|
| Sling length                          | 200                                | The lumen maintenance factor               | 96 %                                                         |
| Luminous efficacy                     | 130 lm/W                           | Beam angle                                 | 30 x 90 °                                                    |
| Colour of the light                   | White                              | Power Factor                               | 0,9                                                          |
| Energy efficiency class 2019/2015     | C                                  | Ambient temperature suitable for operation | -20÷45 °C                                                    |
| Luminous flux                         | 2600 lm                            | For indoor use                             | Inside                                                       |
| Colour consistency in McAdam ellipses | ≤6                                 | IEC protection class                       | I                                                            |
| IP protection rating                  | IP20                               | IK protection rating                       | 08                                                           |
| Warranty (years)                      | 5                                  | Lamp's warm-up time to 60%                 | 1                                                            |
| Dimmable function                     | 0-10                               | Length                                     | 586 mm                                                       |
| Survival factor                       | 0.9                                | Width                                      | 70 mm                                                        |
| Lifetime L70B50                       | 50 000                             | Height                                     | 52 mm                                                        |
| Mounting type                         | mixed                              | Power                                      | <ul style="list-style-type: none"><li>20 W</li></ul>         |
| Frequency of the supply voltage       | 50/60Hz                            | Voltage                                    | <ul style="list-style-type: none"><li>220-240 V AC</li></ul> |
| Colour rendering index Ra             | 80                                 | Correlated colour temperature              | <ul style="list-style-type: none"><li>4000 K</li></ul>       |

LED line PRIME

product\_card.label\_product\_code475640product\_card.label\_product\_gtin:5907777475640

LED line PRIME Linear fixture FUSION  
20W 4000K 2600lm 0-10V 30\*90° black


product\_card.label\_dimensions

product\_card.label\_curve\_light

product\_card.label\_product\_gallery




product\_card.label\_logistic\_data




product\_card.label\_single\_package

|        |            |
|--------|------------|
| Width  | 586 mm     |
| Height | 52 mm mm   |
| Length | 70 mm mm   |
| Weight | 1,14 kg kg |



product\_card.label\_collective\_package

|                                         |             |
|-----------------------------------------|-------------|
| Number of pieces/tape in meters pack zb | 12 szt.     |
| Width                                   | 690 mm mm   |
| Height of collective packaging          | 260 mm      |
| Length                                  | 260 mm mm   |
| Weight                                  | 13,93 kg kg |
| Volume                                  | 0,046 m3 m3 |



product\_card.label\_europalette

|                                              |           |
|----------------------------------------------|-----------|
| Number of pieces/tapes in meters euro pallet | 288       |
| Quantity collective euro pallet              | 288 szt.  |
| Weight of a euro pallet                      | 672 kg kg |
| Pallet height                                | 1710 mm   |
| Quantity in 1 layer                          | 48 szt.   |
| Number of layers                             | 6         |

LED line PRIME

product\_card.label.product\_code: 475640 product\_card.label.product\_gtin: 5907777475640

LED line PRIME Linear fixture FUSION  
20W 4000K 2600lm 0-10V 30\*90° black

product\_card.label.realization\_photo