

LED line PRIME


Code: 475640

EAN: 5907777475640

**Linear luminaire FUSION 4000K 20W
2600lm 30*90° IP20 60cm black PRIME
0-10V**



FUSION 20W linear housing from LED line PRIME is an advanced lighting solution that provides a light stream of 2600 lm at a colour temperature of 4000 K. Its efficiency reaches 130 lm/W and the power supply is 220-240 V AC. It is characterized by a wide light angle of 30 x 90° and the possibility of dimming in the 0-10V system.

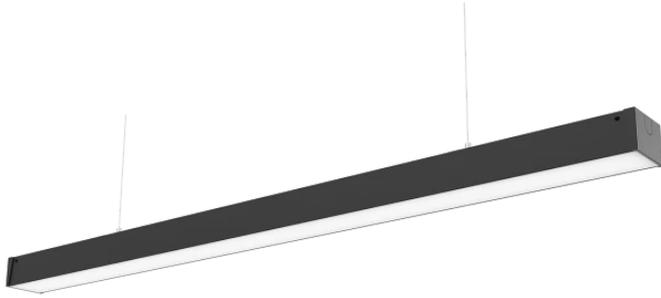

Technical data

| Parameter | Value |
|-----------------------------------|----------------|
| Energy efficiency class 2019/2015 | C |
| Warranty | 5/7* |
| Power | • 20 W |
| Voltage | • 220-240 V AC |
| Correlated colour temperature | • 4000 K |
| Colour of the light | White |
| Colour rendering index Ra | 80 |
| IP protection rating | IP20 |
| IK protection rating | 08 |
| IEC protection class | I |
| Luminous efficacy | 130 |
| Luminous flux | 2600 |
| The lumen maintenance factor | 96 |
| Lifetime L70B50 | 50 000 h |

| Parameter | Value |
|--|---------|
| L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible | 35000 h |
| Survival factor | 0.9 |
| Dimmable function | 0-10 |
| Colour consistency in McAdam ellipses | ≤6 |
| Sling length | 200 cm |
| Mounting type | mixed |
| Frequency of the supply voltage | 50/60Hz |
| Beam angle | 30 x 90 |
| Power Factor | 0,9 |
| Lamp's warm-up time to 60% | 1 |
| Ambient temperature suitable for operation | -20÷45 |
| For indoor use | Inside |
| Height | 52 |

LED line PRIME

Code: 475640


EAN: 5907777475640

**Linear luminaire FUSION 4000K 20W
2600lm 30*90° IP20 60cm black PRIME
0-10V**

Technical drawing






Light distribution

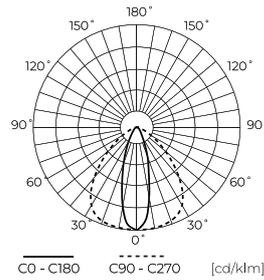

Additional product photos



Logistics data



Single packaging

| | |
|--------|---------|
| Width | 586 mm |
| Height | 52 mm |
| Length | 70 mm |
| Weight | 1,14 kg |

Bulk packaging

| | |
|----------|----------|
| Quantity | 12 |
| Width | 690 mm |
| Height | 260 mm |
| Length | 260 mm |
| Volume | 0,046 m3 |
| Weight | 13,93 kg |
| Comments | |

Europallet

| | |
|-------------------|---------|
| Quantity | 288 |
| Height | 1710 mm |
| Quantity in layer | 48 |
| Number of layers | 6 |
| Bulk quantity | 288 |
| Weight | 672 kg |

LED line PRIME

Code: 475640

EAN: 5907777475640

**Linear luminaire FUSION 4000K 20W
2600lm 30*90° IP20 60cm black PRIME
0-10V**

Example application