


LED line square gypsum downlight GU10 POLIS



The gypsum fixture is dedicated for recessed plasterboard's installation.

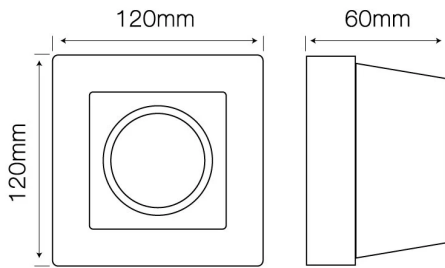

Product is suitable for painting.



Mounting hole diameter



Manufacturer issues a 5-year warranty for this product.



Adjustable mounting clips allow for the luminaire to be adjusted during recessed plasterboard's installation.

Parameter	Value
Maximum suitable lamp power	35
IP protection rating	20
Warranty (years)	5
Colour	white
Lamp's diameter	50
Material (housing)	Gypsum
Type of surface suitable for installation	F
Distance from illuminated surface	0.5
Mounting hole diameter	125x125 mm

Parameter	Value
Plaster thickness	9 - 17mm
For indoor use	Inside
IEC protection class	II
Full box quantity	24 pc
Length	120 mm
Width	120 mm
Height	60 mm
Product weight with packaging	710 g
Master carton weight (kg)	17,04

Single packaging



Width 145 mm
Height 145 mm
Length 70 mm
Weight 0,73 kg
1

Bulk packaging



Width 24
455 mm
Length 305
305 mm
Weight 17,52 kg
Volume 0,042326375 m³

Europallet



Weight of a euro pallet 25
438 kg
1669
5
5