

LED line PRIME


Code: 478962

EAN: 5907777478962

Linear luminaire FUSION 4000K 60W
7800lm P18° IP20 150cm black PRIME



FUSION 60W LED line PRIME and 4000K colour temperature provides an intense light stream of 7800 lumens. It is characterized by a high energy efficiency of 130 lm/W and a power factor PF 0.9. The angle of light distribution is 120° and the use of lenses allows to adjust its direction. A body made of aluminium guarantees excellent heat discharge.

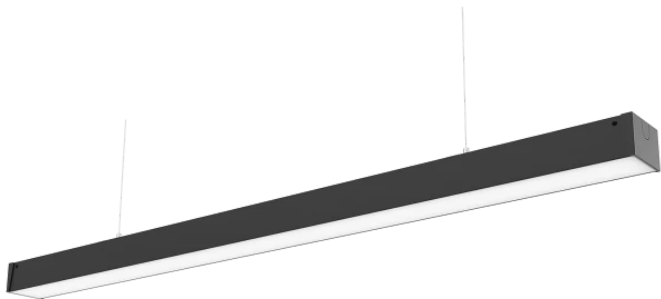

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 60 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	7800
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	50 000 h
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52


LED line PRIME

Code: 478962


EAN: 5907777478962

Linear luminaire FUSION 4000K 60W
7800lm P18° IP20 150cm black PRIME

Technical drawing






Light distribution



Additional product photos



Logistics data



Single packaging

Width	1444 mm
Height	52 mm
Length	70 mm
Weight	1,97 kg

Bulk packaging

Quantity	12
Width	1550 mm
Height	260 mm
Length	260 mm
Volume	0,104 m3
Weight	23,89 kg
Comments	

Europallet

Quantity	144
Height	1550 mm
Quantity in layer	144
Number of layers	1
Bulk quantity	144
Weight	286,8 kg

LED line PRIME

Code: 478962

EAN: 5907777478962

**Linear luminaire FUSION 4000K 60W
7800lm P18° IP20 150cm black PRIME**

Example application