

LED line PRIME

Code: 204027

EAN: 5905378204027

**Linear luminaire FUSION 4000K 20W
2600lm LR40° IP20 60cm white PRIME**



FUSION 20W linear housing from LED line PRIME combines modern design with functionality. It emits light with a colour temperature of 4000K and a light stream of 2600 lm, achieving 130 lm/W efficiency. Made of durable aluminum, it ensures effective heat draining and long life up to 50,000 hours. IP20 and IK08 protections guarantee high quality and energy class C and PF of 0.9 promote energy savings.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	2600
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	50 000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0.9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52

LED line PRIME


Code: 204027

EAN: 5905378204027


**Linear luminaire FUSION 4000K 20W
2600lm LR40° IP20 60cm white PRIME**

Technical drawing




Light distribution



Additional product photos

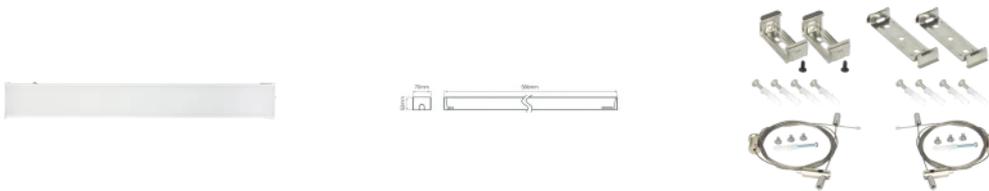

Logistics data



Single packaging

Width	586 mm
Height	52 mm
Length	70 mm
Weight	1,14 kg

Bulk packaging

Quantity	12
Width	690 mm
Height	260 mm
Length	260 mm
Volume	0,046 m3
Weight	13,93 kg
Comments	

Europallet

Quantity	288
Height	1710 mm
Quantity in layer	48
Number of layers	6
Bulk quantity	288
Weight	672 kg

LED line PRIME

Code: 204027

EAN: 5905378204027

**Linear luminaire FUSION 4000K 20W
2600lm LR40° IP20 60cm white PRIME**

Example application