


LED line PRIME

Code: 201255

EAN: 5905378201255

LED line PRIME Panel Backlit 28W
4000K 4000lm 595x595

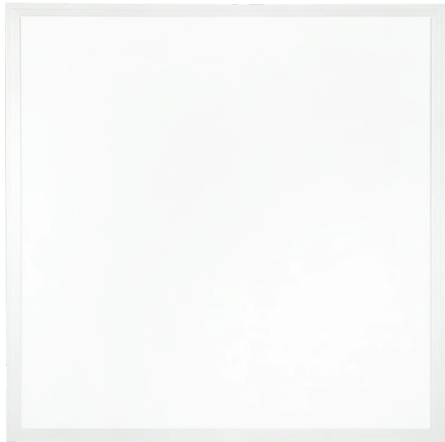

Technical data

Parameter	Value	Parameter	Value
Luminous efficacy	142 lm/W	Material (cover)	polystyrene
Colour of the light	White	Material (housing)	aluminum
Energy efficiency class 2019/2015	C	LED type	SMD LED 2835
Luminous flux	4000 lm	LED quantity	96
Colour consistency in McAdam ellipses	≤3	Power Factor	0,9
IP protection rating	IP20	Number of on/off cycles	25000
Warranty (years)	5	Colour consistency in McAdam ellipses	≤3
Dimmable function	PWM	Ambient temperature suitable for operation	-25÷45 °C
Survival factor	0.9	For indoor use	Inside
Lifetime L70B50	75 000	IEC protection class	II
Frequency of the supply voltage	50/60Hz	Lamp's warm-up time to 60%	1
Colour rendering index Ra	80	Height	28 mm
Colour	white	Power	• 28 W
The lumen maintenance factor	96 %	Voltage	• 220-240 V AC
Beam angle	120 °	Correlated colour temperature	• 4000 K

LED line PRIME

Code: 201255

EAN: 5905378201255

LED line PRIME Panel Backlit 28W
4000K 4000lm 595x595


Dimensions

Light distribution

Additional product photos




Logistics data




Single packaging

Width	600 mm
Height	31 mm mm
Length	673 mm mm
Weight	1,31 kg kg
	1



Bulk packaging

Number of pieces/tape in meters pack zb	6 szt.
Width	630 mm mm
Height of collective packaging	670 mm
Length	240 mm mm
Weight	8,16 kg kg
Volume	0,101 m3 m3



Europallet

Number of pieces/tapes in meters euro pallet	72
Quantity collective euro pallet	60 szt.
Weight of a euro pallet	81,6 kg kg
Pallet height	1340 mm
Quantity in 1 layer	30 szt.
Number of layers	2

LED line PRIME

Code: 201255

EAN: 5905378201255

**LED line PRIME Panel Backlit 28W
4000K 4000lm 595x595**

Example application