


LED line PRIME

Code: 201248

EAN: 5905378201248

LED line PRIME Panel Backlit 40W
4000K 4800lm 595x595 0-10V

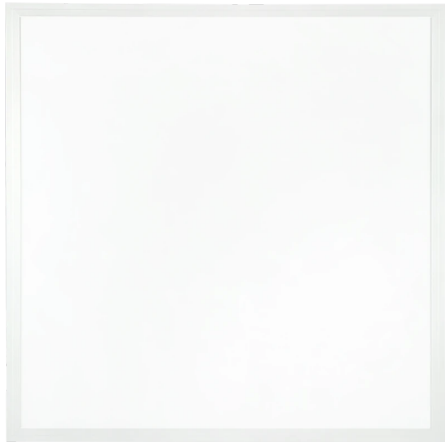

product_card.label_technical_data

Parameter	Value
Luminous efficacy	120 lm/W
Colour of the light	White
Energy efficiency class 2019/2015	E
Luminous flux	4800 lm
Colour consistency in McAdam ellipses	≤3
IP protection rating	IP20
Warranty (years)	5
Dimmable function	0-10
Survival factor	0.9
Lifetime L70B50	75 000
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
Colour	white
The lumen maintenance factor	96 %
Beam angle	120 °
Material (cover)	polystyrene

Parameter	Value
Material (housing)	aluminum
LED type	SMD LED 2835
LED quantity	48
Power Factor	0,9
Number of on/off cycles	25000
Colour consistency in McAdam ellipses	≤3
Ambient temperature suitable for operation	-25÷45 °C
For indoor use	Inside
IEC protection class	II
IK protection rating	02
Lamp's warm-up time to 60%	1
Height	28 mm
Power	• 40 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K

LED line PRIME

Code: 201248


EAN: 5905378201248

LED line PRIME Panel Backlit 40W
4000K 4800lm 595x595 0-10V




product_card.label_dimensions

product_card.label_curve_light

product_card.label_product_gallery



product_card.label_logistic_data



Single packaging

Width	600 mm
Height	31 mm mm
Length	673 mm mm
Weight	1,47 kg kg
	1

Bulk packaging

Number of pieces/tape in meters pack zb	6 szt.
Width	630 mm mm
Height of collective packaging	695 mm
Length	240 mm mm
Weight	9,12 kg kg
Volume	0,105 m3 m3

Europallet

Quantity collective euro pallet	60 szt.
Weight of a euro pallet	91,2 kg kg
Pallet height	1390 mm
Quantity in 1 layer	30 szt.
Number of layers	2

LED line PRIME

Code: 201248

EAN: 5905378201248

**LED line PRIME Panel Backlit 40W
4000K 4800lm 595x595 0-10V**

Example application