

LED line PRIME

Code: 204003

EAN: 5905378204003

**Linear luminaire FUSION 4000K 20W
2600lm 90*110° IP20 60cm white PRIME**



The 20W LED line FUSION PRIME linear luminaire and light color 4000K generates a light stream of 2600 lm. The use of long-lived LEDs ensures light efficiency of 130 lm/W, which contributes to energy savings. The angle of light distribution is 90x110° and the IP20 leak class guarantees safety of indoor use.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	2600
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	50 000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	2600
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0.9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52

LED line PRIME


Code: 204003

EAN: 5905378204003


**Linear luminaire FUSION 4000K 20W
2600lm 90*110° IP20 60cm white PRIME**

Technical drawing




Light distribution



Additional product photos

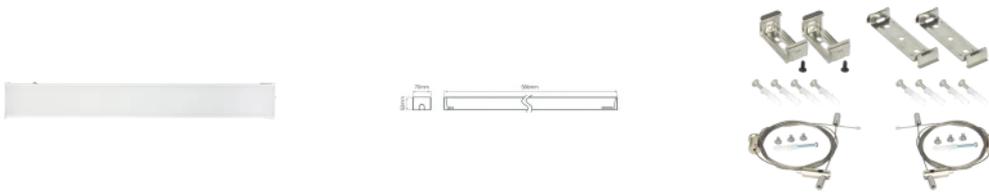

Logistics data



Single packaging

Width	586 mm
Height	35 mm
Length	70 mm
Weight	1,14 kg

Bulk packaging

Quantity	12
Width	690 mm
Height	260 mm
Length	120 mm
Volume	0,021 m3
Weight	13,93 kg
Comments	

Europallet

Quantity	288
Height	1820 mm
Quantity in layer	48
Number of layers	7
Bulk quantity	336
Weight	415,04 kg

LED line PRIME

Code: 204003

EAN: 5905378204003

**Linear luminaire FUSION 4000K 20W
2600lm 90*110° IP20 60cm white PRIME**

Example application