

LED line LITE


Code: 209978

EAN: 5905378209978

LED line LITE Downlight EASY FLEX  
18W CCT 1530lm round white with  
motion sensor



Downlight EASY FLEX 18W CCT is a modern lighting setting, characterized by an elegant round shape and white finish. It emits a total luminous flux of 1530 lm at 85 lm/W. Thanks to the function of changing the temperature of light (3000 K, 4000 K, 5000 K) it provides flexibility to adjust the atmosphere to the needs of the user.

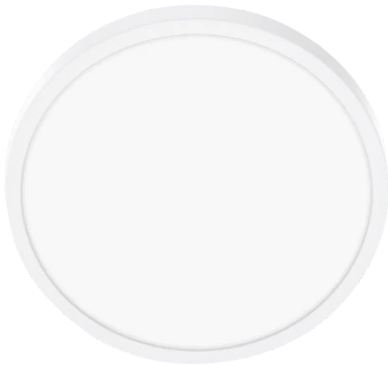

Technical data

Parameter	Value
Voltage	• 220-240 V AC
Luminous efficacy	85
Energy efficiency class 2019/2015	E
Luminous flux	1530
Colour consistency in McAdam ellipses	≤6
Warranty (years)	3
IP protection rating	IP20
Survival factor	0.9
Lifetime L70B50	30 000 h
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
Colour	White
The lumen maintenance factor	96
Fixture's diameter	225

Parameter	Value
Beam angle	120
LED type	SMD2835
LED quantity	86
Number of on/off cycles	15000
Colour consistency in McAdam ellipses	≤6
Ambient temperature suitable for operation	-20 ÷ 40
Installation method	3in1 surface mounted, flush mounted, suspended
Mounting hole diameter	65-180
IEC protection class	II
IK protection rating	05
Lamp's warm-up time to 60%	1 s
Correlated colour temperature	• 3000 K • 4000 K • 5000 K
Power	• 18 W

LED line LITE


Code: 209978

EAN: 5905378209978


**LED line LITE Downlight EASY FLEX  
18W CCT 1530lm round white with  
motion sensor**

**Technical drawing**


**Light distribution**




**Additional product photos**




**Logistics data**



**Single packaging**



**Bulk packaging**



**Europallet**

---

LED line LITE

Code: 209978

EAN: 5905378209978

**LED line LITE Downlight EASY FLEX  
18W CCT 1530lm round white with  
motion sensor**

---

**Example application**