

LED line PRIME


Code: 204539

EAN: 5905378204539

**Backlit Panel 3CCT (3/4/5K) 34W 4760lm
IP20 62x62cm white UGR<19 PRIME**



The 34W PRIME LED line panel is a perfect light source that emits a light stream of 4,760 lumens. It is characterized by a Ra 80 colour reproduction factor and a low UGR value (<19), which provides comfortable space lighting. The choice of light colour temperature in the ranges 3000 K, 4000 K and 5000 K allows to adjust the atmosphere of the room according to the needs.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 34 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 3000 K • 4000 K • 5000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	02
IEC protection class	II
Luminous efficacy	140
Luminous flux	4760
The lumen maintenance factor	96
Lifetime L70B50	50 000 h
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9

Parameter	Value
Dimmable function	Triac
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Beam angle	90
LED type	SMD LED 2835
LED quantity	128
Power Factor	0,9
Number of on/off cycles	50000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	30
Colour	White
Material (housing)	Aluminium
Material (cover)	Polystyrene


LED line PRIME

Code: 204539


EAN: 5905378204539

**Backlit Panel 3CCT (3/4/5K) 34W 4760lm
IP20 62x62cm white UGR<19 PRIME**

Technical drawing

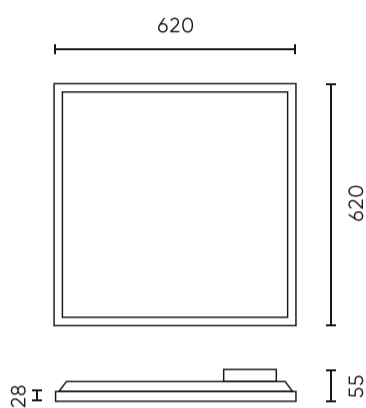


Light distribution

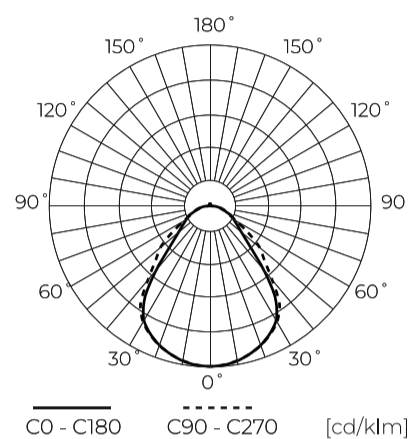

Additional product photos



Logistics data



Single packaging

Quantity	1
Width	35 mm
Height	640 mm
Length	630 mm
Weight	1,97 kg

Bulk packaging

Quantity	5
Width	200 mm
Height	655 mm
Length	645 mm
Volume	0,085 m3
Weight	12,8 kg
Comments	

Europallet

Height	1320 mm
Quantity in layer	30
Number of layers	2
Bulk quantity	60
Weight	153,6 kg

LED line PRIME

Code: 204539

EAN: 5905378204539

**Backlit Panel 3CCT (3/4/5K) 34W 4760lm
IP20 62x62cm white UGR<19 PRIME**

Example application