


LED line PRIME

Code: 478481-DALI

EAN: 5905378219984

Panel 2in1 30W 4000K 3600lm 60x60 square DALI PRIME

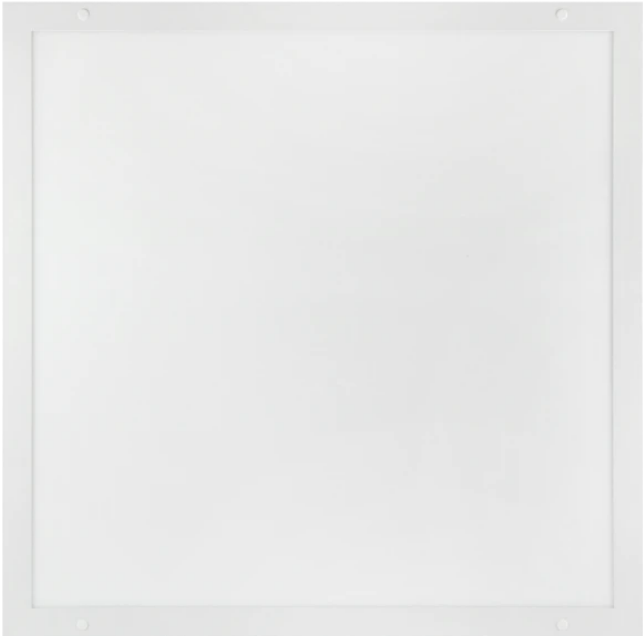

LED panel 2in1 by LED line PRIME with 30W is the ideal solution for modern interiors. It is characterized by a light output of 120 lm/W and a light stream of 3600 lm, which provides excellent brightness of space. The aluminium housing is time-resistant and Yellow Free technology guarantees a long-lasting aesthetic appearance.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	E
Energy class	A++
Warranty	5
Power	• 30 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	02
IEC protection class	II
Luminous efficacy	120
Luminous flux	3600
The lumen maintenance factor	96
Lifetime L70B50	50 000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6

Parameter	Value
Working current	0,1449
Frequency of the supply voltage	50/60Hz
Beam angle	120
LGP	PMMA
LED type	JUFEI 4014
LED quantity	196
Lifespan	50 000 h
Power Factor	0,9
Number of on/off cycles	20000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Installation method	2in1 recessed and surface
Colour	White
Material (housing)	Aluminium
Material (cover)	Polycarbonate

LED line PRIME

Code: 478481-DALI

EAN: 5905378219984

**Panel 2in1 30W 4000K 3600lm 60x60 square DALI PRIME**

**Technical drawing**

**Light distribution**


**Additional product photos**




**Logistics data**



**Single packaging**



**Bulk packaging**



**Europallet**

---

LED line PRIME

Code: 478481-DALI

EAN: 5905378219984

**Panel 2in1 30W 4000K 3600lm 60x60  
square DALI PRIME**

---

**Example application**