

LED line LITE

Code: 207462

EAN: 5905378207462

Park Luminaire PARKLITE 50-80-100W
CCT 6000-12000lm black LITE

New



Technical data

Parameter	Value
ULOR	2,3 %
Luminous efficacy	120 lm/W
Colour of the light	White
Energy efficiency class 2019/2015	E
Luminous flux	6000-12000 lm
Colour consistency in McAdam ellipses	≤6
IP protection rating	IP65
Survival factor	0,9
Lifetime L70B50	25 000
Wire length	400 mm
Weight	2130 g
Mounting type	Lighting pole ø 60mm
Frequency of the supply voltage	50/60Hz
Colour rendering index Ra	80
Colour	Czarny
The lumen maintenance factor	96 %
Fixture's diameter	382
Beam angle	100 °

Parameter	Value
Material (cover)	tempered glass
Material (housing)	aluminum
LED type	SMD LED 2835
LED quantity	384
Power Factor	0,9
Colour consistency in McAdam ellipses	≤6
Ambient temperature suitable for operation	-30÷50 °C
For indoor and outdoor use	YES
IEC protection class	I
IK protection rating	08
Full box quantity	4 pc
Lamp's warm-up time to 60%	1
Length	382 mm
Width	382 mm
Height	117 mm
Power	• 50 W • 80 W • 100 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 3000 K • 4000 K • 6000 K

LED line LITE


Code: 207462

EAN: 5905378207462


Park Luminaire PARKLITE 50-80-100W
CCT 6000-12000lm black LITE

Dimensions


Light distribution



Additional product photos

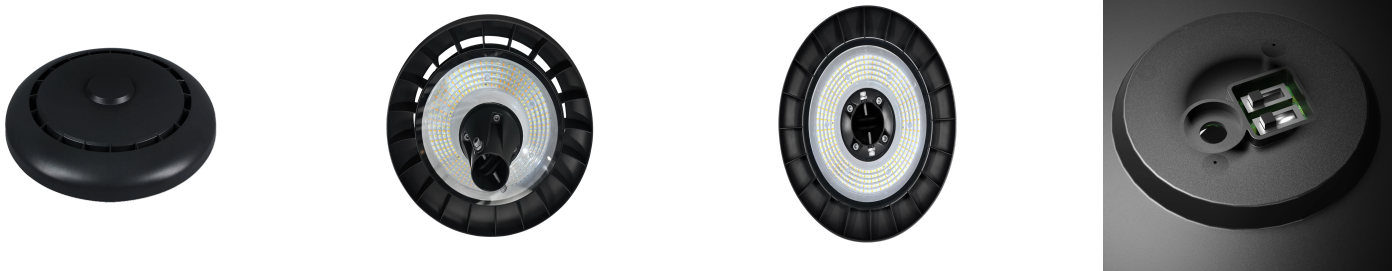


Logistics data




Single packaging

Width	420 mm
Height	135 mm mm
Length	425 mm mm
Weight	2,25 kg kg



Bulk packaging

Number of pieces/tape in meters pack zb	4 szt.
Width	550 mm
Height of collective packaging	445 mm
Length	430 mm
Weight	9,3 kg
Volume	0,105 m3



Europallet

Quantity collective euro pallet	32 szt.
Weight of a euro pallet	74,4 kg
Pallet height	1780 mm
Quantity in 1 layer	8 szt.
Number of layers	4

LED line LITE

Code: 207462

EAN: 5905378207462

**Park Luminaire PARKLITE 50-80-100W
CCT 6000-12000lm black LITE**

Example application