LED line PRIME

Code: 203129-II

EAN: 5905378225152

Road luminaire CAMINO 3CCT(3/4/5.7K) 150W 21000lm IP66 Gray PRIME



CAMINO CCT are fixtures designed for harsh weather conditions, **available in three power variants: 50W, 70W, 100W, 150W**. Equipped with carefully selected and quality-tested components, they ensure **reliability of operation** and a long lifespan of the fixtures

5 WARRANTY | 7* WARRANTY | IP 66 | PF 0,95

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 150 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 3000-4000-5700 K
Colour of the light	CCT
Colour rendering index Ra	70
IP protection rating	IP66
IK protection rating	08
IEC protection class	I
Luminous efficacy	140
Luminous flux	21000 lm
The lumen maintenance factor	96 %
Lifetime L70B50	100 000 h

Parameter	Value
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	70000 h
L90B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	50000 h
Survival factor	0,9
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Beam angle	150 x 110
LED type	LUMILEDS 2835
Power Factor	0,95
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷40
For indoor use	Outside
Height	84 mm
Material (housing)	Aluminium
Material (cover)	Tempered glass

T: +48 29 764 77 00 export@ledline.pl **www.ledline.pl/en**

LED line PRIME


Code: 203129-II

EAN: 5905378225152

Road luminaire CAMINO 3CCT(3/4/5.7K) 150W 21000lm IP66 Gray PRIME

Technical drawing

Light distribution

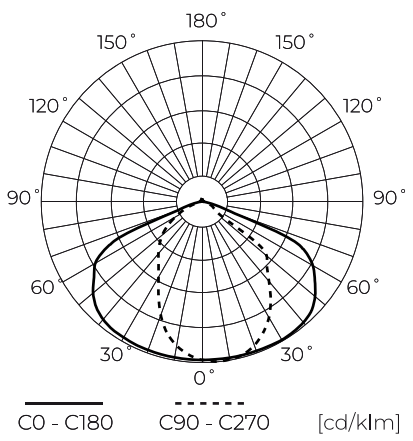

Additional product photos











Logistics data




Single packaging

Quantity	1
Width	277 mm
Height	680 mm
Length	116 mm
Weight	4,2 kg



Bulk packaging

Quantity	1
Width	572 mm
Height	378 mm
Length	706 mm
Weight	4,2 kg



Europallet

Quantity	60
Height	1900 mm
Bulk quantity	6
Weight	280 kg

T: +48 29 764 77 00 export@ledline.pl **www.ledline.pl/en**

LED line PRIME

Code: 203129-II

EAN: 5905378225152

Road luminaire CAMINO 3CCT(3/4/5.7K) 150W 21000lm IP66 Gray PRIME

Example application

T: +48 29 764 77 00 export@ledline.pl **www.ledline.pl/en**