

LED line PRIME


Code: 248122-II

EAN: 5905378201590

LED bulb GU11 6500K 3W 330lm 230V
38° GU10 Ceramic PRIME



LED bulb GU11 3W 6500K 330lm from LED line PRIME is an innovative light source with high efficiency. It emits a cool, white light with a colour temperature of 6500 K, ideally suited for precise point lighting thanks to a light angle of 38°. It is characterized by a lifetime of up to 30,000 hours and a light output of 110 lm/W. Equipped with ceramic housing for durability and stability of operation at a voltage of 170 V to 250 V AC.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	F
Warranty	5
Power	• 3 W
Voltage	• 170-250 V AC
Correlated colour temperature	• 6500 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
Luminous efficacy	110
Luminous flux	330 lm
The lumen maintenance factor	96
Lifetime L70B50	30 000 h
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6

Parameter	Value
Frequency of the supply voltage	50/60Hz
Lamp's type	GU11
Beam angle	38°
LED type	SMD2835
Power Factor	0,5
Number of on/off cycles	50000
Lamp's warm-up time to 60%	1
For indoor use	Inside
Height	50
Fixture's diameter	35 mm
Colour	White
Material	Ceramic
Material (housing)	Ceramics

LED line PRIME

Code: 248122-II


EAN: 5905378201590

LED bulb GU11 6500K 3W 330lm 230V

38° GU10 Ceramic PRIME

Technical drawing




Light distribution

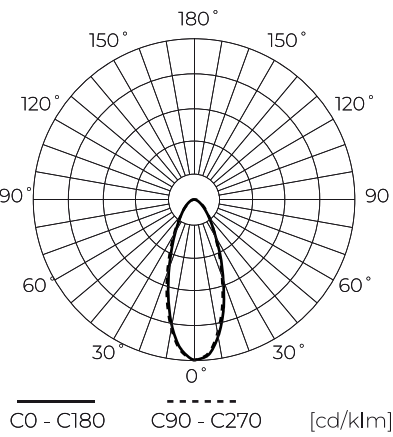

Additional product photos



Logistics data

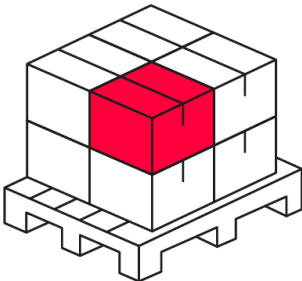

Single packaging

Quantity	1
Width	50 mm
Height	57 mm
Length	50 mm
Weight	0,03 kg

Bulk packaging

Quantity	100
Width	205 mm
Height	135 mm
Length	420 mm
Volume	0,011 m3
Weight	3,5 kg
Comments	

Europallet

Quantity	25000
Height	1950 mm
Quantity in layer	600
Number of layers	14
Bulk quantity	8400
Weight	420 kg

LED line PRIME

Code: 248122-II

EAN: 5905378201590

**LED bulb GU11 6500K 3W 330lm 230V
38° GU10 Ceramic PRIME**

Example application

