

LED line PRIME

Code: 204263

EAN: 5905378204263

LED line PRIME FUSION linear lamp  
60W 4000K 7800lm LR40° white



FUSION 60W linear setting from the LED line PRIME is a perfect solution for modern spaces. It is characterized by a light stream of 7800 lumens and a colour temperature of 4000 K, which provides ideal light conditions. 130 lm/W efficiency guarantees energy savings. The solid aluminium body protects against overheating, which promises long product life. The frame meets IP20 and IK08 standards.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 60 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	7800
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0.9
Lamp's warm-up time to 60%	1 s
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Length	1444
Width	70
Height	52

LED line PRIME

Code: 204263


EAN: 5905378204263

LED line PRIME FUSION linear lamp  
60W 4000K 7800lm LR40° white


Technical drawing

Light distribution

Additional product photos

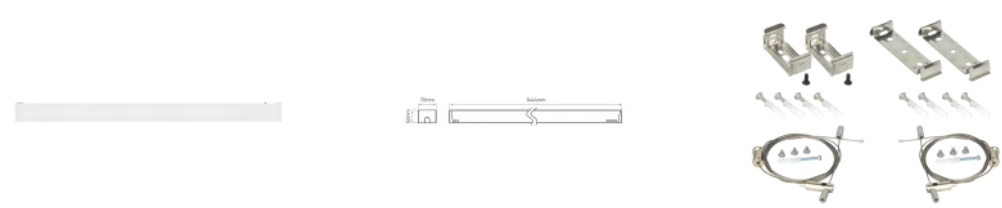

Logistics data

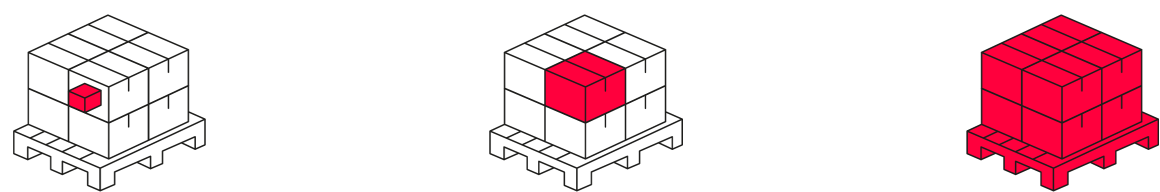

Single packaging

Width	1444 mm
Height	52 mm
Length	70 mm
Weight	1,97 kg

Bulk packaging

Quantity	12
Width	1550 mm
Height	260 mm
Length	260 mm
Volume	0,104 m3
Weight	23,89 kg
Comments	

Europallet

Quantity	144
Height	1550 mm
Quantity in layer	144
Number of layers	1
Bulk quantity	144
Weight	286,8 kg

---

LED line PRIME

Code: 204263

EAN: 5905378204263

**LED line PRIME FUSION linear lamp  
60W 4000K 7800lm LR40° white**

---

**Example application**