

LED line PRIME


Code: 204195

EAN: 5905378204195

LED line PRIME FUSION linear lamp
40W 4000K 5200lm 0-10V 120*120°
white



The FUSION 40W linear housing from the PRIME LED line is a high-performance unit with a luminous flux of 5200 lm and a colour temperature of 4000 K. Its luminous efficiency reaches 130 lm/W, which provides effective lighting. Thanks to the 0-10V dimming adjustment and 120 degree light transmission angle, the setting perfectly integrates into a variety of interior arrangements.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 40 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	5200
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
Survival factor	0.9
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0,9
Lamp's warm-up time to 60%	1 s
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Length	1158
Width	70
Height	52

LED line PRIME

Code: 204195


EAN: 5905378204195

LED line PRIME FUSION linear lamp
40W 4000K 5200lm 0-10V 120*120°
white


Technical drawing

Light distribution

Additional product photos

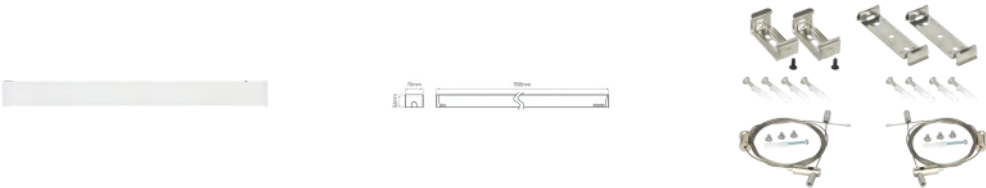


Logistics data




Single packaging

Width	1158 mm
Height	52 mm
Length	70 mm
Weight	1,82 kg



Bulk packaging

Quantity	12
Width	1260 mm
Height	260 mm
Length	260 mm
Volume	0,085 m3
Weight	22,09 kg
Comments	



Europallet

Quantity	144
Height	1260 mm
Quantity in layer	144
Number of layers	1
Bulk quantity	144
Weight	265,2 kg

LED line PRIME

Code: 204195

EAN: 5905378204195

**LED line PRIME FUSION linear lamp
40W 4000K 5200lm 0-10V 120*120°
white**

Example application