

LED line PRIME


Code: 475640

EAN: 5907777475640

LED line PRIME Linear fixture FUSION
20W 4000K 2600lm 0-10V 30*90° black



FUSION 20W linear housing from LED line PRIME is an advanced lighting solution that provides a light stream of 2600 lm at a colour temperature of 4000 K. Its efficiency reaches 130 lm/W and the power supply is 220-240 V AC. It is characterized by a wide light angle of 30 x 90° and the possibility of dimming in the 0-10V system.

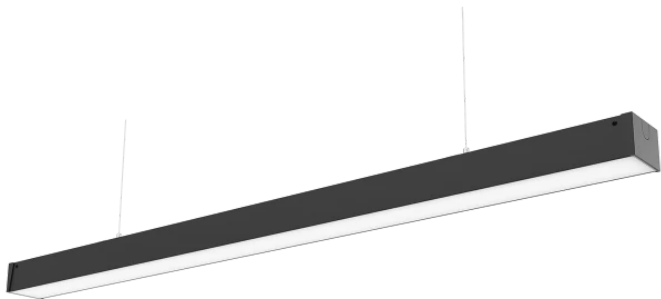

Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	2600
The lumen maintenance factor	96
Lifetime L70B50	50 000 h

Parameter	Value
Survival factor	0.9
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Beam angle	30 x 90
Power Factor	0,9
Lamp's warm-up time to 60%	1 s
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Length	586
Width	70
Height	52

LED line PRIME

Code: 475640


EAN: 5907777475640

LED line PRIME Linear fixture FUSION
20W 4000K 2600lm 0-10V 30*90° black

Technical drawing




Light distribution



Additional product photos




Logistics data




Single packaging

Width	586 mm
Height	52 mm
Length	70 mm
Weight	1,14 kg



Bulk packaging

Quantity	12
Width	690 mm
Height	260 mm
Length	260 mm
Volume	0,046 m3
Weight	13,93 kg
Comments	



Europallet

Quantity	288
Height	1710 mm
Quantity in layer	48
Number of layers	6
Bulk quantity	288
Weight	672 kg

LED line PRIME

Code: 475640

EAN: 5907777475640

**LED line PRIME Linear fixture FUSION
20W 4000K 2600lm 0-10V 30*90° black**

Example application