

LED line LITE



Code: 247422

EAN: 5901583247422

LED bulb E27 3000K 15W 1515lm 230V
240° A60 PC LITE



The E27 15W 3000K 1515lm 230V A60 bulb from LED line LITE is an example of innovative lighting technology, distinguished by high efficiency. It emits a luminous flux of 1515 lumens at just 15 W, ensuring excellent energy efficiency. The warm light color (3000 K) creates a cozy atmosphere, and the wide beam angle of 240° guarantees even light distribution.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	F
Warranty	3
Power	• 15 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 3000 K
Colour of the light	White
Colour rendering index Ra	80
Luminous efficacy	101
Luminous flux	1515lm
The lumen maintenance factor	96
Lifetime L70B50	50 000 h
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h

Parameter	Value
Survival factor	0.9
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Beam angle	240 °
Lifespan	50 000 h
Power Factor	0,5
Number of on/off cycles	50000
Ambient temperature suitable for operation	-20÷40
For indoor use	Inside
Height	119
Fixture's diameter	60 mm
Material (housing)	Polycarbonate

LED line LITE


Code: 247422

EAN: 5901583247422

LED bulb E27 3000K 15W 1515lm 230V

240° A60 PC LITE


Technical drawing

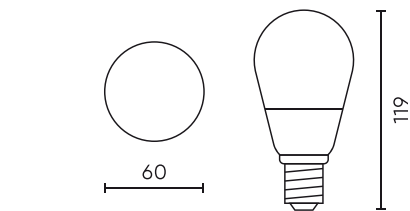

Light distribution


Additional product photos

Logistics data

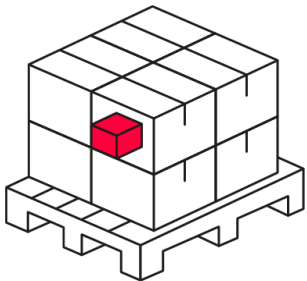


Single packaging

Quantity	1
Width	60 mm
Height	125 mm
Length	60 mm
Weight	0,05 kg



Bulk packaging

Quantity	100
Width	320 mm
Height	270 mm
Length	625 mm
Volume	0,054 m3
Weight	4,5 kg
Comments	



Europallet

Quantity	1800
Height	1890 mm
Quantity in layer	300
Number of layers	7
Bulk quantity	2100
Weight	94,5 kg

LED line LITE

Code: 247422

EAN: 5901583247422

**LED bulb E27 3000K 15W 1515lm 230V
240° A60 PC LITE**

Example application