

LED line PRIME

Code: LL-12-12

EAN: 5907777479167

Power Supply 12-12 IP67 12W 12V PRIME

The PRIME 12-12 IP67 12V LED line power supply is a high quality 12W output power device and a wide input voltage range from 90 to 264 V AC. It offers stable operation with rated current of 1 A and efficiency of 0.76. The product has IP67 protection class, which provides water and dust resistance. Additionally, the power supply meets a number of safety standards, including EN55015 and PN-EN IEC 61000-3-2.



5
WARRANTY

IP
67

PF
0,95

MAX
-30÷70°C

CE

Technical data

Parameter	Value
Warranty	5
Power	• 12 W
Voltage	• 90-264 V AC
IEC protection class	II
Output current range	0 ÷ 1A
Input voltage frequency range	47 ÷ 63Hz
Rated current	1A
Safety standards	IP67
Efficiency	0,76

Parameter	Value
Voltage tolerance	-/+5.0%
Ambient humidity	20 ÷ 90%
Insulation strength	3kVAC
EMC standards	EN55015
Mounting type	surface
Inrush current (typ.)	6A / 230VAC
Ambient temperature suitable for operation	-30÷70
Output voltage	• 12 V


LED line PRIME

Code: LL-12-12

EAN: 5907777479167


Power Supply 12-12 IP67 12W 12V PRIME

Technical drawing




Light distribution

Additional product photos

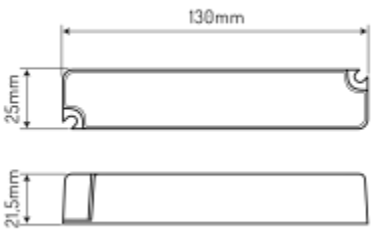


Logistics data




Single packaging

Quantity	1
Width	41 mm
Height	27 mm
Length	165 mm
Weight	0,13 kg



Bulk packaging

Quantity	100
Width	290 mm
Height	230 mm
Length	345 mm
Weight	14,5 kg



Europallet

Quantity	3200
Height	1020 mm
Bulk quantity	32
Weight	474 kg

LED line PRIME

Code: LL-12-12

EAN: 5907777479167

Power Supply 12-12 IP67 12W 12V PRIME

Example application