


LED line PRIME


Code: 201248

EAN: 5905378201248

Backlit Panel 4000K 40W 4800lm
60x60 cm white PRIME 0-10V

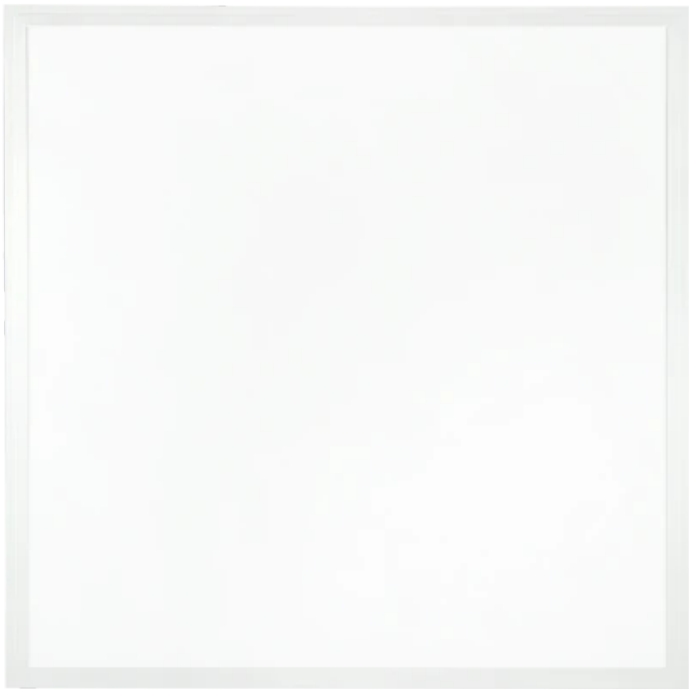

The PRIME 40W LED line panel is a modern lighting luminaire offering a light stream of up to 4800 lm at a colour temperature of 4000 K. Thanks to backlit technology, SMD LEDs 2835 ensure uniform light distribution and high efficiency at 120 lm/W. The aluminium housing ensures durability and resistance to damage. Additionally, the possibility of dimming in the range of 0-10V allows for precise adjustment of the intensity of light.

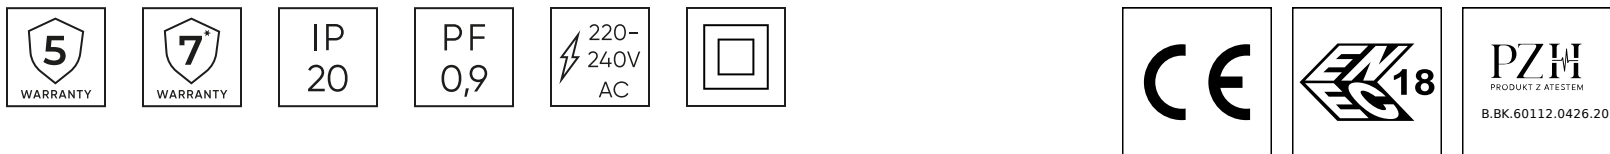

Technical data

Parameter	Value
Energy efficiency class 2019/2015	E
Warranty	5/7*
Power	• 40 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	02
IEC protection class	II
Luminous efficacy	120
Luminous flux	4800
The lumen maintenance factor	96
Lifetime L70B50	75 000 h
L80B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	50000 h
L90B* – difference B10–B50 ≈ 1% (according to LightingEurope) – negligible	35000 h
Survival factor	0.9

Parameter	Value
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤3
Frequency of the supply voltage	50/60Hz
Beam angle	120
LED type	SMD LED 2835
LED quantity	48
Power Factor	0,9
Number of on/off cycles	25000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-25÷45
For indoor use	Inside
Length	1195 mm
Width	295 mm
Height	28 mm
Colour	white
Material (housing)	Aluminium
Material (cover)	Polystyrene

LED line PRIME

Code: 201248


EAN: 5905378201248

Backlit Panel 4000K 40W 4800lm

60x60 cm white PRIME 0-10V

Technical drawing




Light distribution

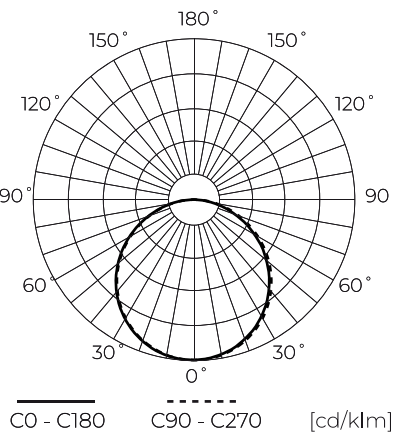

Additional product photos



Logistics data



Single packaging

Quantity	1
Width	600 mm
Height	31 mm
Length	673 mm
Weight	1,47 kg

Bulk packaging

Quantity	6
Width	630 mm
Height	240 mm
Length	695 mm
Volume	0,105 m3
Weight	12,273 kg
Comments	

Europallet

Height	1390 mm
Quantity in layer	30
Number of layers	2
Bulk quantity	60
Weight	91,2 kg

LED line PRIME

Code: 201248

EAN: 5905378201248

**Backlit Panel 4000K 40W 4800lm
60x60 cm white PRIME 0-10V**

Example application