

LED line PRIME

Code: 204058

EAN: 5905378204058

**Linear luminaire FUSION 4000K 20W  
2600lm 60\*110° IP20 60cm white PRIME  
0-10V**



FUSION 20W LED line PRIME provides high light efficiency of 130 lm/W and 2600 lumens. Thanks to the colour temperature 4000K, the emitted light is white and natural. The luminaire is characterized by an angle of light of 60°x110°, allowing effective illumination of the space. The built-in 0-10V dimming function allows you to adjust brightness to individual user needs.



**Technical data**

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 20 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	2600
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	50 000 h
Survival factor	0.9
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0.9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52

LED line PRIME

Code: 204058

EAN: 5905378204058


**Linear luminaire FUSION 4000K 20W  
2600lm 60\*110° IP20 60cm white PRIME  
0-10V**

**Technical drawing**






**Light distribution**

**Additional product photos**

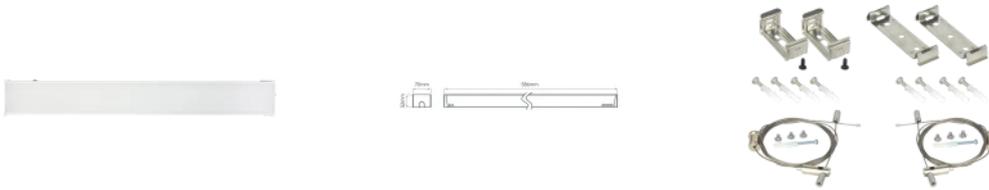

**Logistics data**



**Single packaging**

Width	586 mm
Height	52 mm
Length	70 mm
Weight	1,14 kg

**Bulk packaging**

Quantity	12
Width	690 mm
Height	260 mm
Length	260 mm
Volume	0,046 m3
Weight	13,93 kg
Comments	

**Europallet**

Quantity	288
Height	1710 mm
Quantity in layer	48
Number of layers	6
Bulk quantity	288
Weight	672 kg

---

LED line PRIME

Code: 204058

EAN: 5905378204058

**Linear luminaire FUSION 4000K 20W  
2600lm 60\*110° IP20 60cm white PRIME  
0-10V**

---

**Example application**