

LED line PRIME

Code: 204218

EAN: 5905378204218

**Linear luminaire FUSION 4000K 40W
5200lm P18° IP20 120cm white PRIME 0-10V**



FUSION 40W linear housing from PRIME LED line is a perfect solution for demanding spaces. It emits light with a colour temperature of 4000 K, generating a luminous flux of 5200 lm at 130 lm/W. The angle of light distribution is 120°, which provides even lighting. The integrated 0-10V dimming function allows you to adjust the intensity of the lighting.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	C
Warranty	5/7*
Power	• 40 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	08
IEC protection class	I
Luminous efficacy	130
Luminous flux	5200
The lumen maintenance factor	96

Parameter	Value
Lifetime L70B50	50 000 h
Survival factor	0.9
Dimmable function	0-10
Colour consistency in McAdam ellipses	≤6
Sling length	200 cm
Standby power	0
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Power Factor	0.9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷45
For indoor use	Inside
Height	52

LED line PRIME


Code: 204218

EAN: 5905378204218


**Linear luminaire FUSION 4000K 40W
5200lm P18° IP20 120cm white PRIME 0-10V**

Technical drawing




Light distribution



Additional product photos

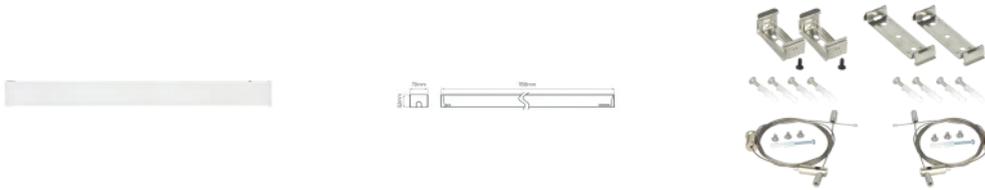

Logistics data



Single packaging

Width	1158 mm
Height	52 mm
Length	70 mm
Weight	1,82 kg

Bulk packaging

Quantity	12
Width	1260 mm
Height	260 mm
Length	260 mm
Volume	0,085 m3
Weight	22,09 kg
Comments	

Europallet

Quantity	144
Height	1260 mm
Quantity in layer	144
Number of layers	1
Bulk quantity	144
Weight	265,2 kg

LED line PRIME

Code: 204218

EAN: 5905378204218

**Linear luminaire FUSION 4000K 40W
5200lm P18° IP20 120cm white PRIME 0-
10V**

Example application