

LED line LITE


Code: 471345

EAN: 5907777471345

LED strip 600/5m SMD 12V 2700K 9,6W
IP65 8mm 5m 960lm/m LITE



600 SMD 12V 2700K 9.6W IP65 LED line LITE is an innovative light source with high efficiency. Thanks to the use of SMD 2835 diodes, the tape emits warm light with a colour temperature of 2700K, creates a pleasant atmosphere in each interior. It is characterized by a light output of 100 lm/W and a light angle of 120°.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	F
Warranty	3
Power	• 9.6 W / m
Voltage	• 12 V DC
Correlated colour temperature	• 2700 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP65
IEC protection class	III
Cutting section	2,5 cm
Luminous efficacy	100
The lumen maintenance factor	0,96
Lifetime L70B50	30 000 h
Dimmable function	PWM

Parameter	Value
Wire length	200 mm
Luminous flux (lm)	960
Current (Im)	0,8
Beam angle	120
LED type	SMD 2835
LED quantity	600
Compatible dimmer type	PWM
Laminate (colour)	White
Laminate (thickness)	2
LED quantity (lm)	120
Type of adhesive tape	3M 300 LSE
Ambient temperature suitable for operation	-20÷45
Height	3 mm

LED line LITE


Code: 471345

EAN: 5907777471345


LED strip 600/5m SMD 12V 2700K 9,6W

IP65 8mm 5m 960lm/m LITE

Technical drawing






Light distribution

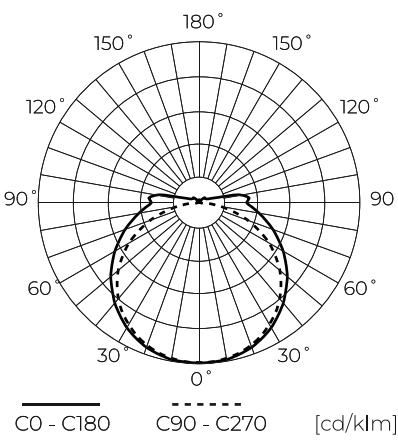

Additional product photos

Logistics data



Single packaging

Quantity	5 m
Width	180 mm
Height	20 mm
Length	180 mm
Weight	0,185 kg

Bulk packaging

Quantity	40
Width	320 mm
Height	180 mm
Length	360 mm
Volume	0,020 m3
Weight	7,66 kg
Comments	

Europallet

Quantity	2400
Height	1800 mm
Quantity in layer	
Number of layers	
Bulk quantity	60
Weight	490 kg

LED line LITE

Code: 471345

EAN: 5907777471345

**LED strip 600/5m SMD 12V 2700K 9,6W
IP65 8mm 5m 960lm/m LITE**

Example application